Revision History

Rev.	History	Issue Date	Remark
0.1	Initial version	20010107	Preliminary Version created by Randall
1.0	Add Revision History	20150322	Rick Hiaso
1.1	Specification Summary Gain:29dB	20211006	Alden

Taiwan Microelectronics Technologies Inc. reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice. Taiwan Microelectronics Technologies Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of Taiwan Microelectronics Technologies Inc. products in such applications is understood to be fully at the risk of the customer.

TAIWAN MICROELECTRONIC CONFIDENTIAL

TM2006 2.4-2.5GHz RF Front-End MCM

General Description

The TM2006 is a front-end MCM Module and uses an advanced Gallium Arsenide (GaAs) process. The front-end module consists of a Power Amplifier (PA), Low-Noise Amplifier (LNA) and a RF single pole double throw (SPDT) Switch. This device makes it ideal for IEEE 802.11.b/g, *Bluetooth*, 2.4Ghz Audio/Video, Wireless Data Terminal and portable battery powered equipment. The PA delivers +22.5dBm (maximum) output power with a high Power Added Efficiency (PAE) 32%. The noise figure of LNA is below 1.8dB. The RF SPDT Switch has very low insertion loss 0.4dB in the 2.4GHz to 2.5GHz range. The device is packaged in a QFN 3mm by 3mm 16L package.

Features

- High Efficient Power Amplifier: 32% at Pout = 22.5dBm
- P-1dB: +22dBm Typical @ +3.3V
- Low-Noise Amplifier (NF typical 1.8dB)
- Low Insertion Loss: 0.5dB @ 2.45GHz
- IIP3: 55dBm @ Input Power up to 20dBm??
- QFN 3x3 mm 16L with thermal ground ultra-small plastic package
- MSL 1
- ROHS, PFOS, REACH compliant

Product Photo

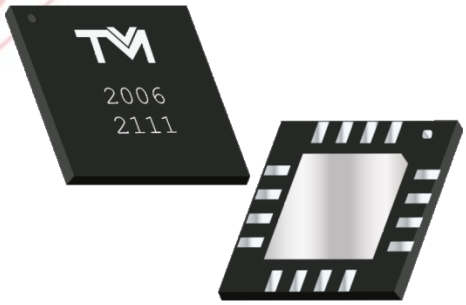

Applications

- Bluetooth™ PA (Class 1)
- Wireless Data Terminal
- Wireless Audio/Video
- Portable Battery Powered Equipment

Functional Block Diagram

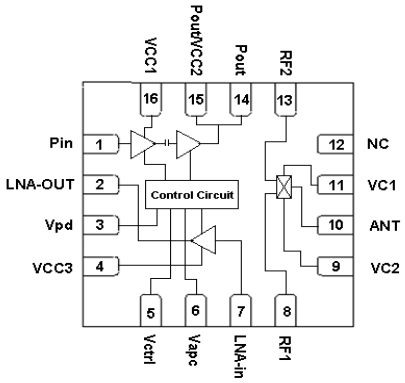

TAIWAN MICROELECTRONIC CONFIDENTIAL

Absolute Maximum Ratings

Parameter	Maximum Rating	Unit
VCC1, VCC2 and VCC3 Supply Voltage	0 to 6	V
Vctrl, Vpd and Vpd Control Voltage	0 to 6	V
Switch Control VC1 , VC2	-6.0 to +6.0 Note	V
RF Switch input Power (>500MHz)	33	dBm
Storage Temperature	-55 to +150	°C
Power Supply Current	350	mA

Note $|VC1-VC2| \leqq 6.0V$

Notes:

1. Operation of this device in excess of any maximum rating as specified above may cause permanent damage to the device.
2. **Caution! ESD Sensitive Device.**

Specification Summary

Tx-Mode (Power Amplifier+Switch)

Parameter	Min.	Typical	Max.	Unit	Condition
Operating Frequency Range		2.4 to 2.5		GHz	
Output Power		+22.5		dBm	
PA Supply Current		125		mA	VCC1=VCC2=Vpd=3.3V, Vapc=3.3V, Pout=20dBm
Power Added Efficiency		25		%	Pout=20dBm,
Harmonics: 2Fo, 3Fo		-35,-32		dBc	Pout=20dBm
PA Small Signal Gain	24	29		dB	P_{IN}=-30dBm
Quiescent Current		80		mA	VCC1=VCC2=VCC3=3.3V Vpd=3.3V, Vapc=3.3V,
P_{-1}dB		21		dBm	VCC1=VCC2=Vpd=3.3V, Vapc=3.3V

Rx-mode (Low Noise Amplifier+Switch)

Parameter	Min.	Typical	Max.	Unit	Condition
Operating Frequency Range		2.4 to 2.5		GHz	
Current consumption		7		mA	VCC3=Vctrl=3.3V, Pin=-30 dBm
Noise Figure		2.5		dB	
Gain		11		dB	VCC3=Vctrl=3.3V, Pin=-30 dBm

Notes: All measurements made in 50Ω system, unless otherwise specified. DC=500MHz.
Tx-mode:VCC1=VCC2=VCC3=Vpd=Vapc=VC2=3.3V, VC1=Vctrl=0V
Rx-mode:VCC1=VCC2=VCC3=VC1=Vctrl=3.3V, Vpd=Vapc=VC2=0V

TAIWAN MICROELECTRONIC 臺灣微電子 CONFIDENTIAL

Functional Pin Description

Name	Pin #	Description
Pin	1	PA input. A matching network with DC block required.
LNA-out	2	LNA output
Vpd	3	Control the gain of PA
VCC3	4	Supply voltage for LNA
Vctrl	5	LNA ON/OFF control pin
Vapc	6	Control the output power of PA
LNA IN	7	LNA input
RF1	8	RF Switch, RF path 1
VC2	9	RF Switch, ANT-RF2 Control Voltage
ANT	10	RF Switch, RF I/O
VC1	11	RF switch , ANT-RF1 Control Voltage
NC	12	No connect
RF2	13	RF Switch, RF path2
Pout	14	PA power out put pin
Pout/Vcc2	15	PA 2nd stage Vcc and Power output pin
Vcc1	16	PA 1st stage Vcc
GND	center pad	This pin must be connected to ground

SW Truth Table

VC1	VC2	ANT-RF2	ANT-RF1
High	Low	Isolation	Insertion Loss
Low	High	Insertion Loss	Isolation

High: 3V to 5V, Low: -0.2V to 0.2V

Pin Configuration

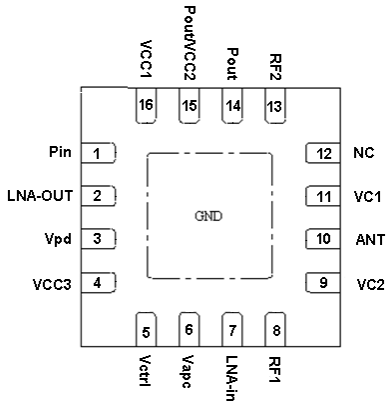

Taiwan Microelectronics Technologies Inc. reserves the right to change products and specifications without notice. Before using the document, please confirm that this is the latest version. The information does not convey any license under rights of Taiwan Microelectronics Technologies Inc. TEL: +886-3-577-1098, FAX: +886-3-577-8539, Version 1.1
http://www.taiwanmicro.com.tw E-mail: sales@taiwanmicro.com.tw.

Typical Characteristics

Tx Path

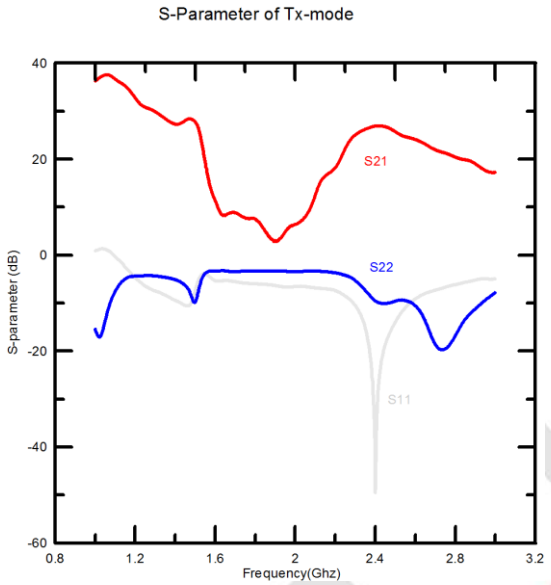

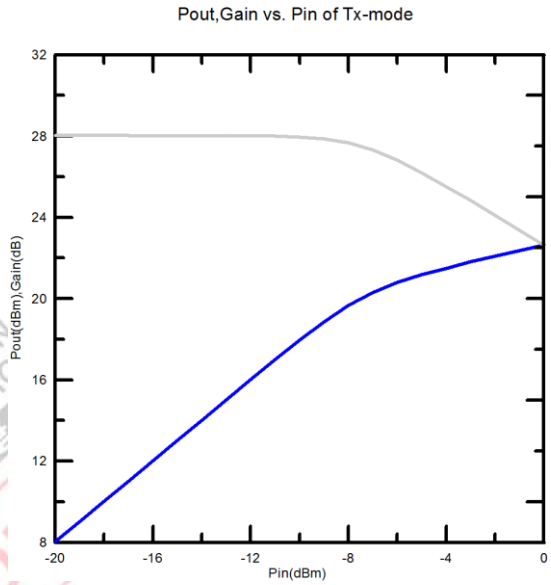

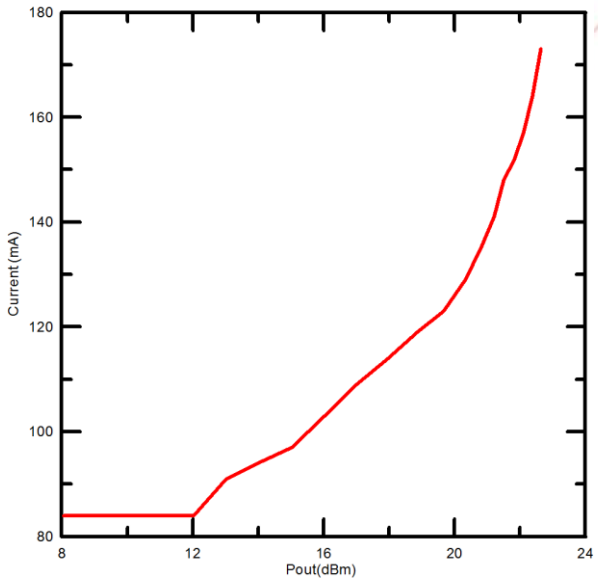

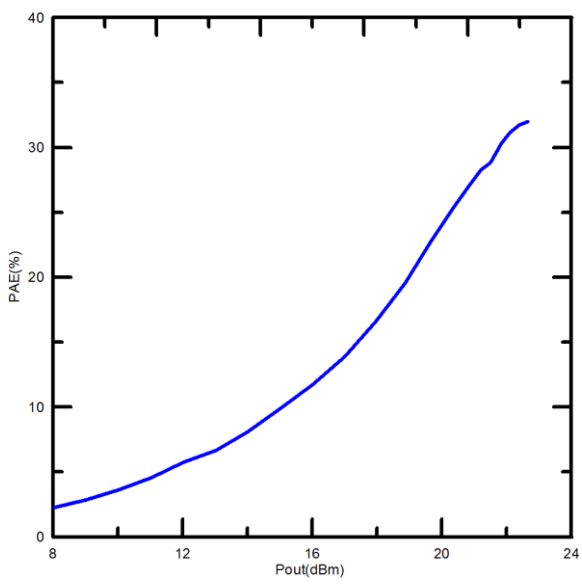

Rx path

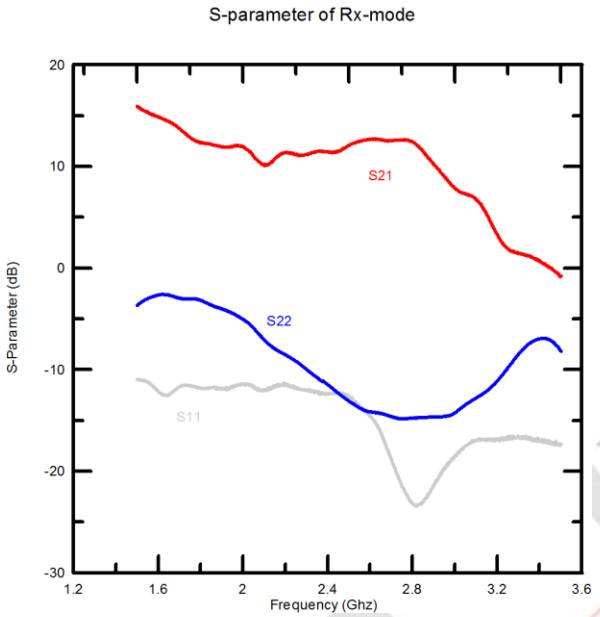

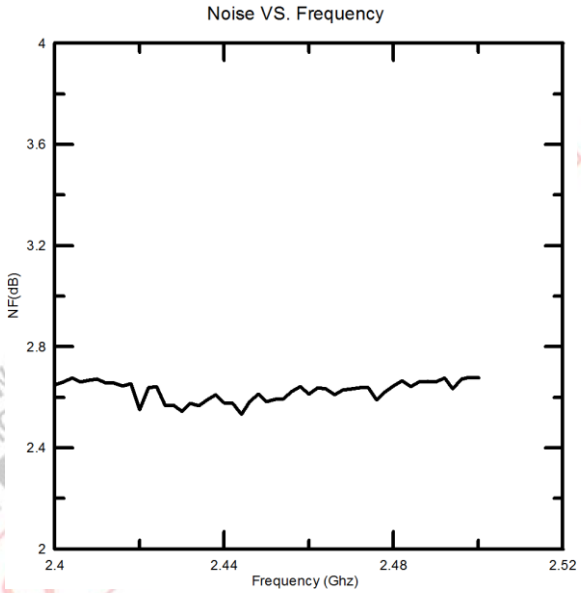

Typical Characteristics

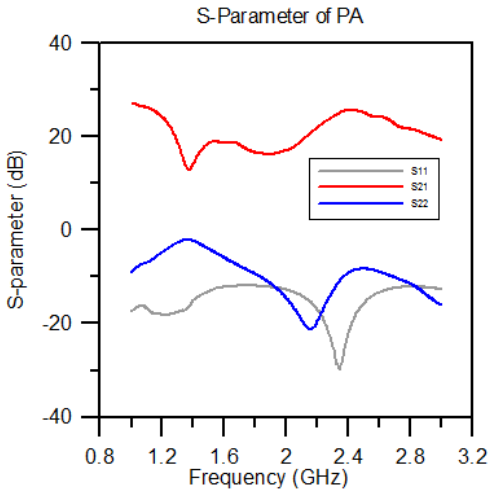

VCC1=VCC2=Vpd=3.3V, Vapc=3.3V and Pin=-30dBm

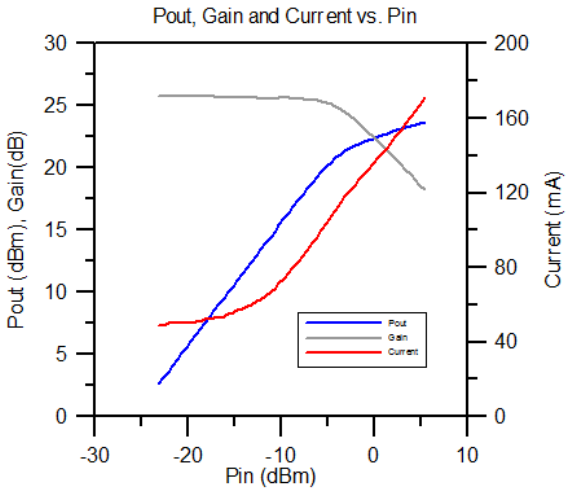

VCC1=VCC2=Vpd=3.3V
Vapc=3.3V and Freq=2.45GHz

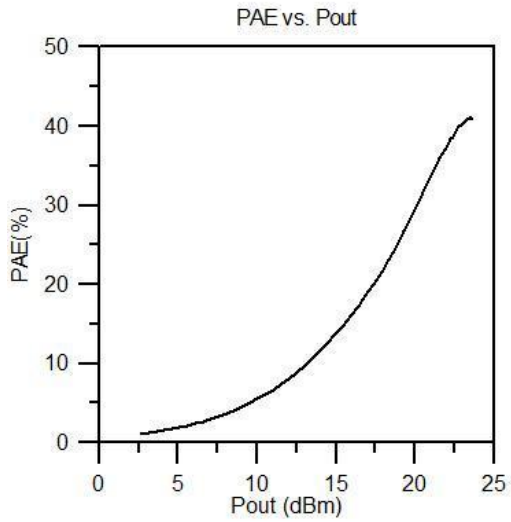

VCC1=VCC2=Vpd=3.3V,
Vapc=3.3V, Freq=2.45GHz

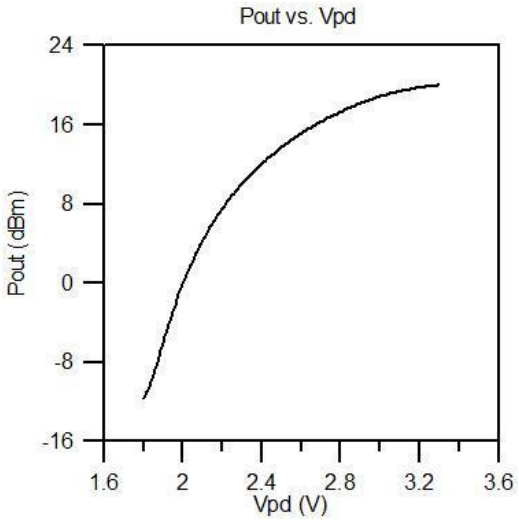

VCC1=VCC2=3.3, Vapc=3.3V
Pin=-5.25dBm, Freq=2.45GHz

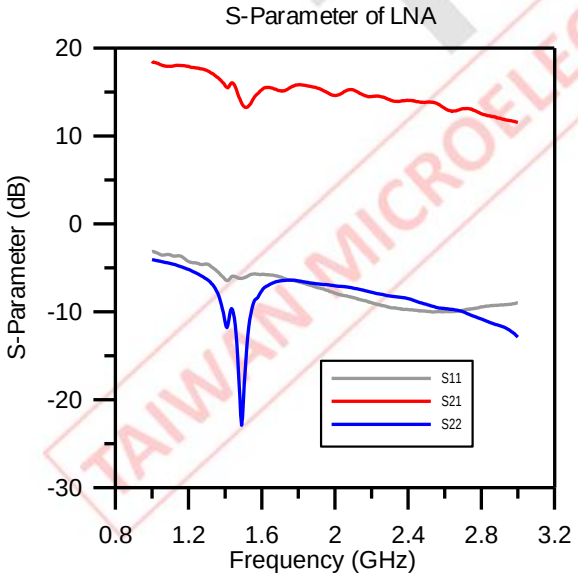

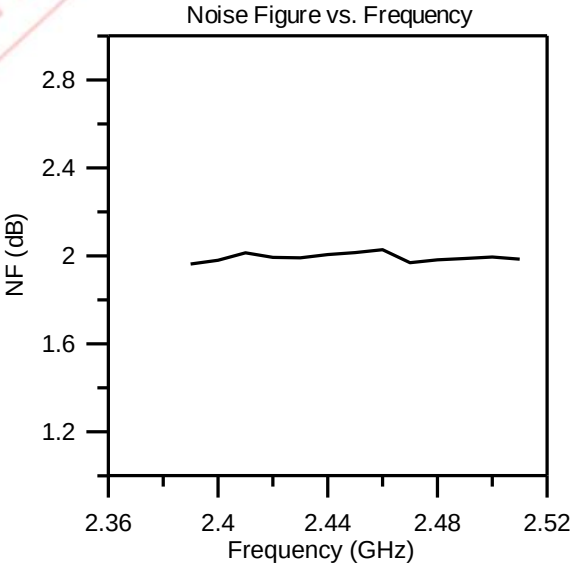

VCC3=Vctrl=3.3V, Pin=-30dBm

TAIWAN MICROELECTRONIC

Switch Typical Characteristics (V_{cc}=0V/3.0V , P_{in}=0dBm) [following RFC is pin10 ANT]

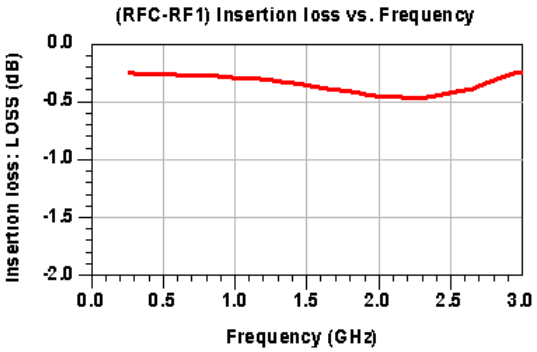

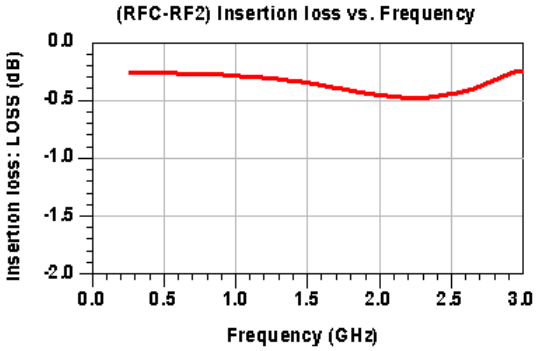

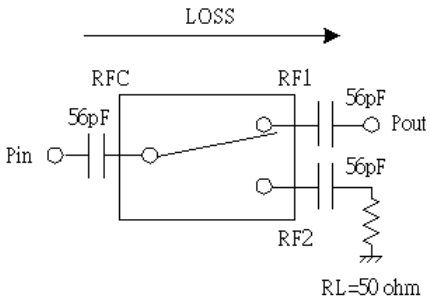

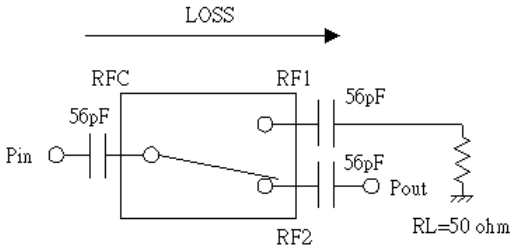

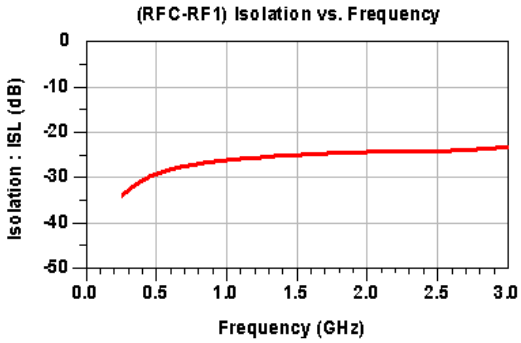

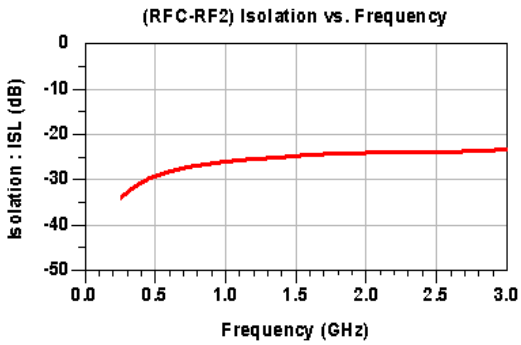

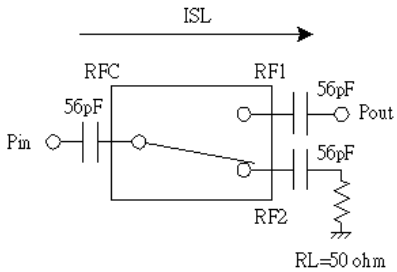

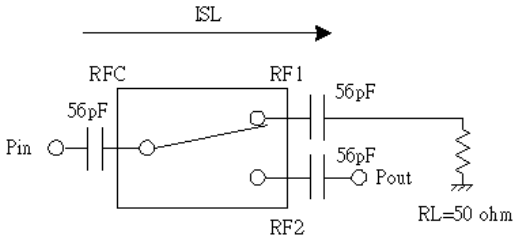

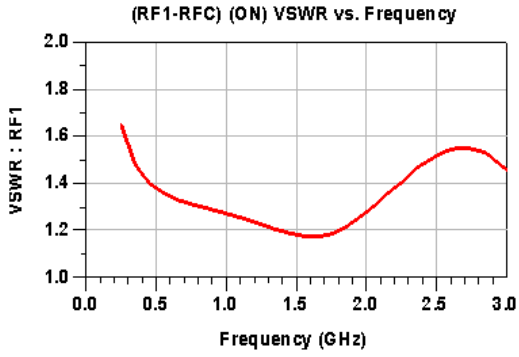
(RF1-RFC) (ON) VSWR vs. Frequency
VSWR : RF1
Frequency (GHz)

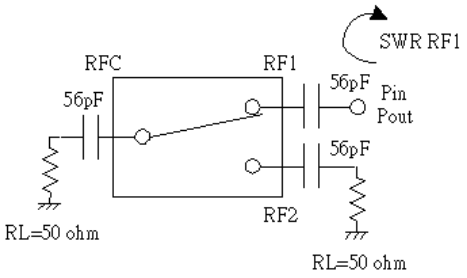
SWR RF1
RFC
RF1
56pF
Pin
Pout
56pF
56pF
RF2
RL=50 ohm
RL=50 ohm

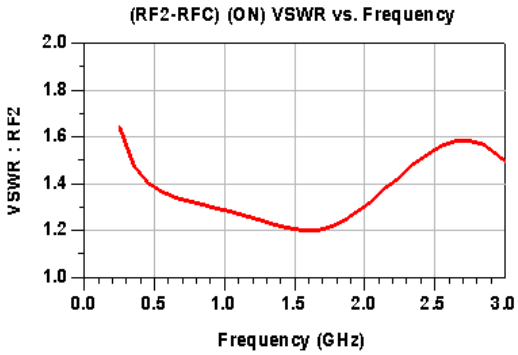
(RF2-RFC) (ON) VSWR vs. Frequency
VSWR : RF2
Frequency (GHz)

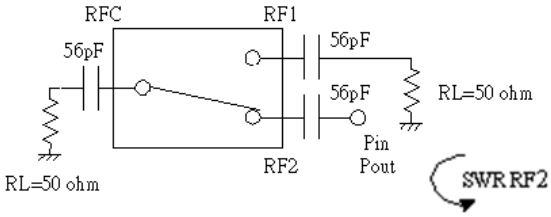
RFC
RF1
56pF
56pF
56pF
RL=50 ohm
Pin
Pout
RF2
RL=50 ohm
SWR RF2

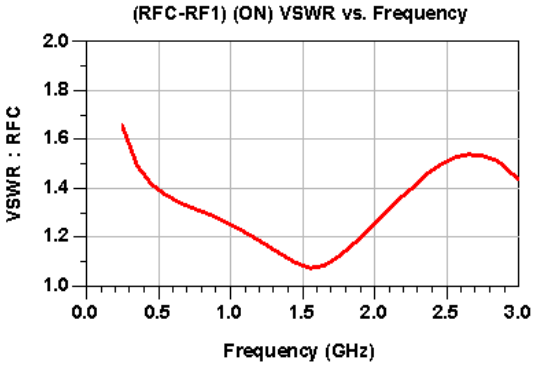
(RFC-RF1) (ON) VSWR vs. Frequency
VSWR : RFC
Frequency (GHz)

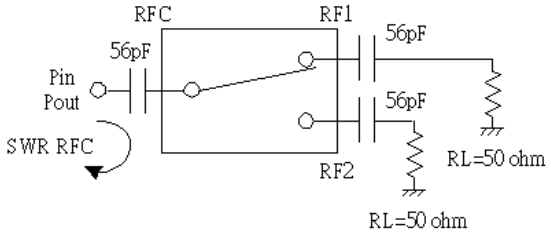
RFC
RF1
56pF
56pF
Pin
Pout
56pF
SWR RFC
RF2
RL=50 ohm
RL=50 ohm

Insertion Loss vs. Input Power
(Vcc=0V/3.0V , 2.5GHz@-40℃,+25℃,+80℃)

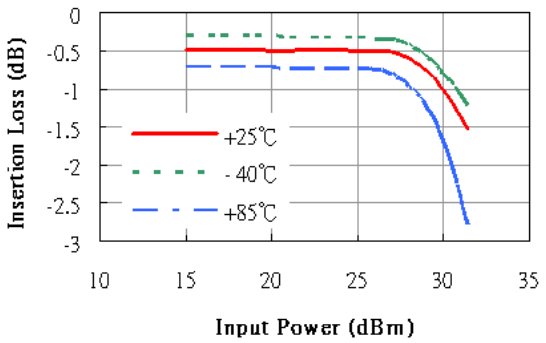

2nd Harmonics vs. Ambient Temperature
(Vcc=0V/3.0V , 2.5GHz@-40℃,+25℃,+80℃)

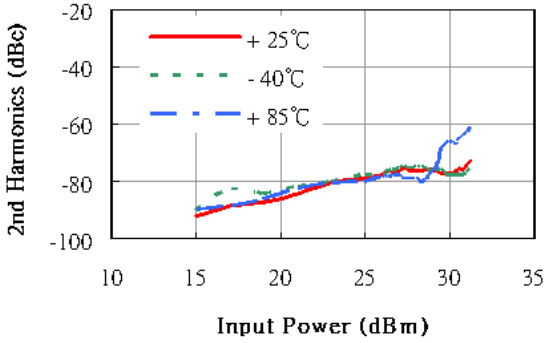

3rd Harmonics vs. Ambient Temperature
(Vcc=0V/3.0V , 2.5GHz@-40℃,+25℃,+80℃)

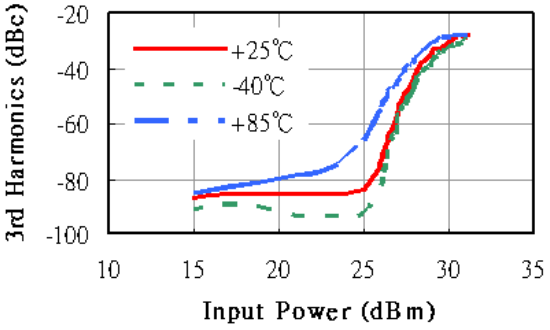

Isolation vs. Input Power
(Vcc=0V/3.0V , 2.5GHz@-40℃,+25℃,+80℃)

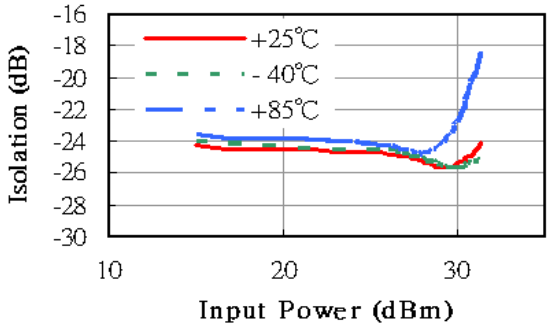

TAIWAN MI

Application circuit

PCB: FR4 and Thickness = 10.4 mils

u-strip line	width	length
TL1	18 mils	45 mils
TL2	18 mils	100 mils
TL3	10 mils	167 mils
TL4	10 mils	167 mils
TL5	8 mils	131 mils

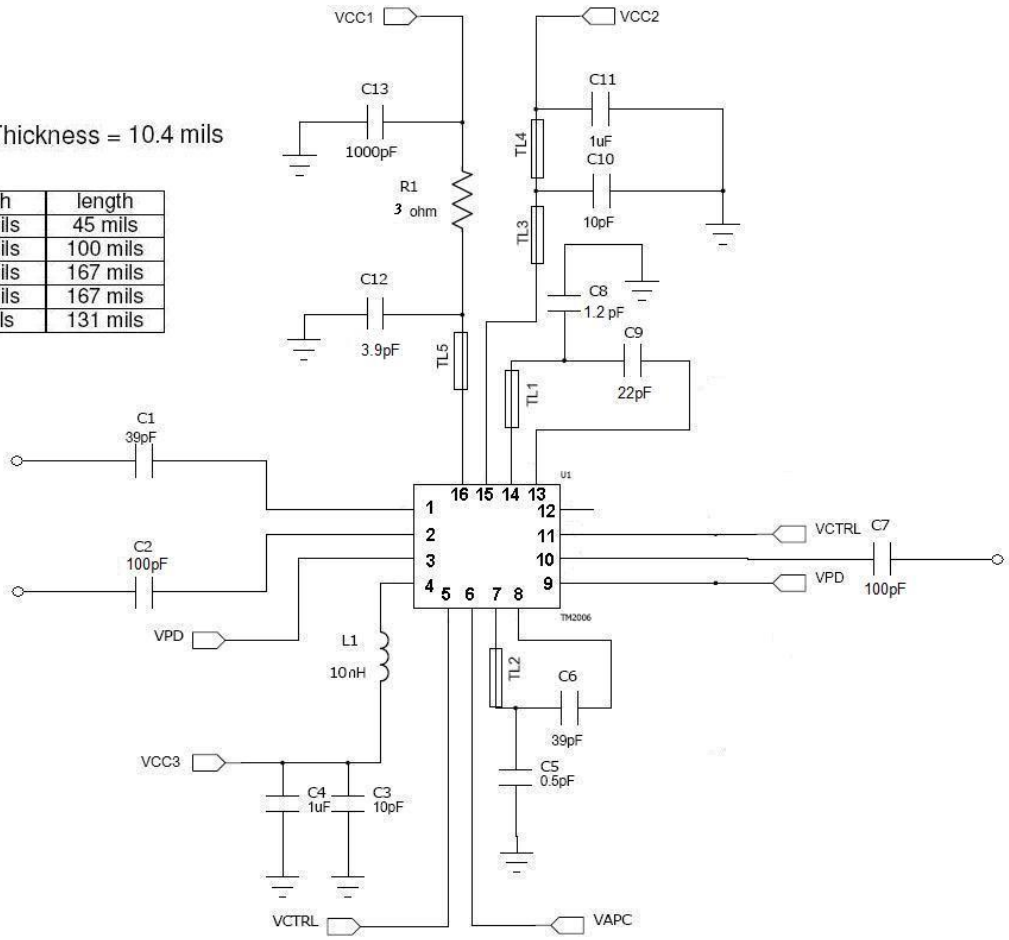

TAIWAN

Package Dimension

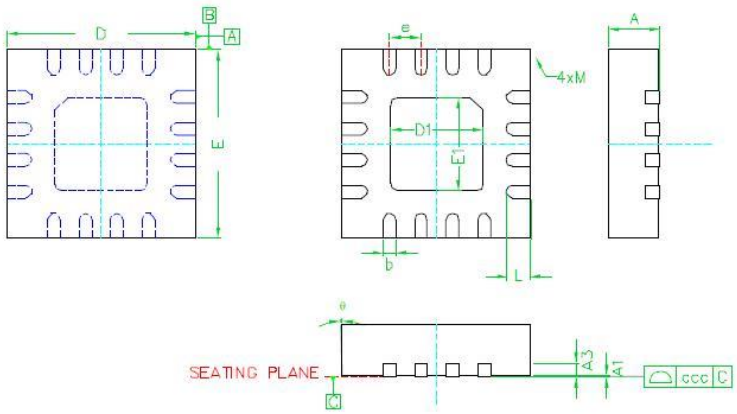

SYMBOLS	DIMENSIONS IN MILLIMETERS		
	MIN	NOM	MAX
A	0.80	0.85	0.90
A1	0	0.010	0.030
A3	---	0.20REF.	---
b	0.18	0.23	0.28
D	2.95	3.00	3.03
D1	---	1.60BSC	---
E	2.95	3.00	3.03
E1	---	1.60BSC	---
e	---	0.50BSC	---
L	0.35	0.40	0.45
θ	-12	---	0
ccc	---	0.08	---
M	---	---	0.05
Burr	0	0.030	0.060

Dimension in mm

For informational purpose only and is subject to change without notice

Product Marking

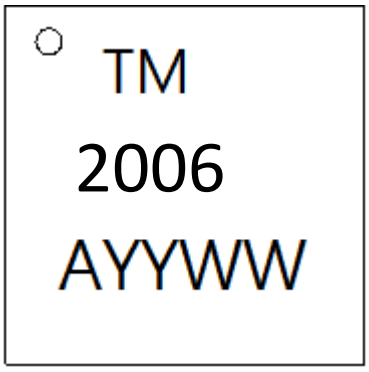

TM: company name

2006: product name

AYYWW : production control code

PCB Land Pattern

Dimension in mm

Through hole drill size: 0.2mm

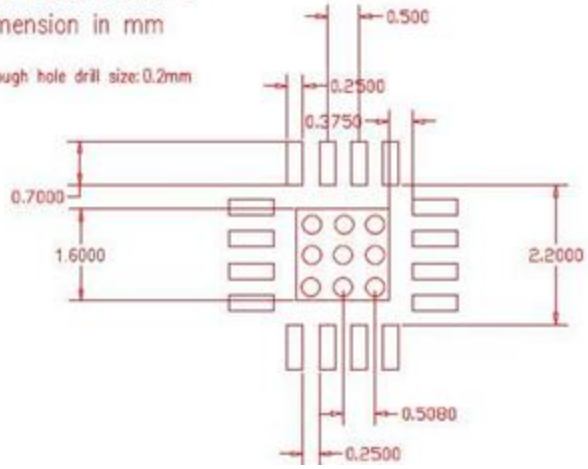

SMT Reflow Profile

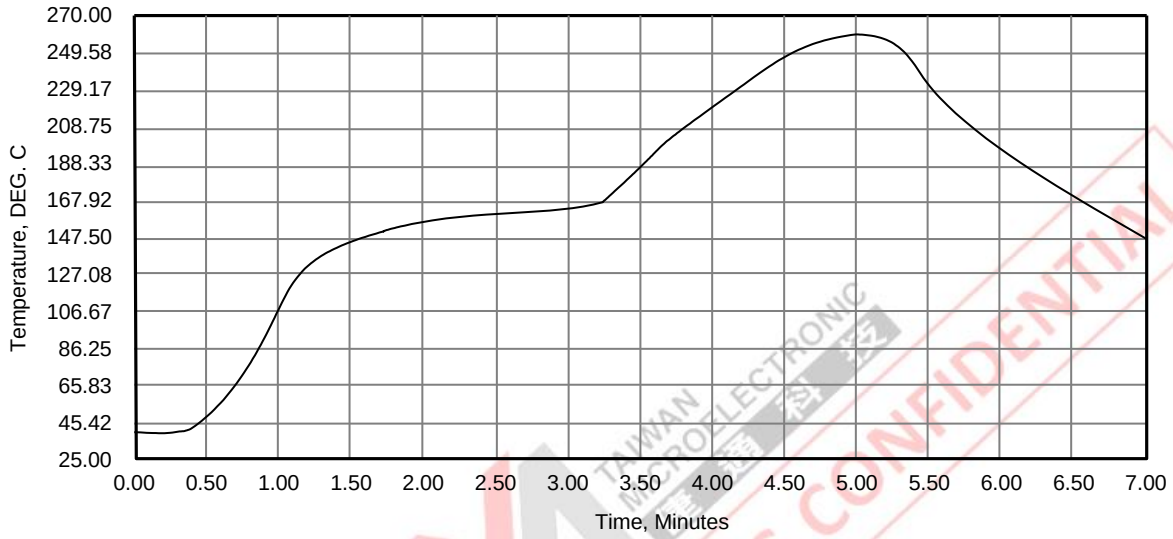

TAIWAN MICROELECTRONIC CONFIDENTIAL

Tape and Reel

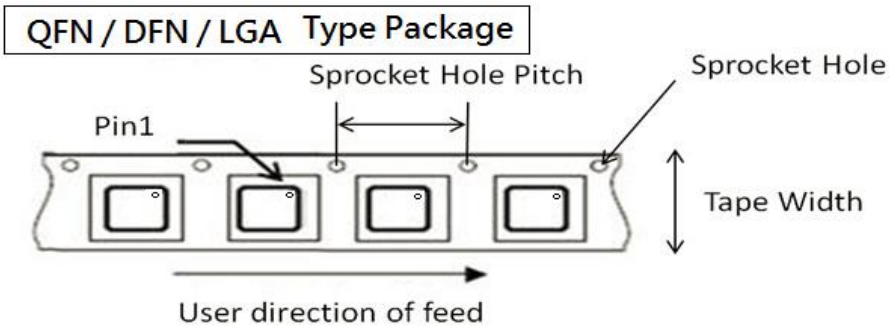

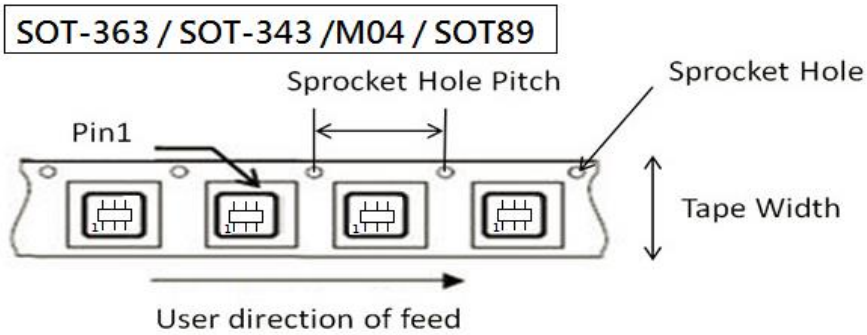

Package Type	Reel Size	Tape width (mm)	Sprocket Hole	Sprocket Hole Pitch (mm)	Leader Qty	Trailer Qty	Desiccant (g)
WLCSP 0.69x0.44mm	14"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
DFN 1.5x1.5mm	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
DFN 2x2mm	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
QFN 2x2mm	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
QFN 3x3mm	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
SOT 343 (M04)	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
SOT 363	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10
SOT 89	7"	12±0.03	Φ1.5 +0.1, -0	4.0±0.1	50	50	10

Handling Precaution

SAFETY INFORMATION ON THIS PRODUCT

Cautions on using this product	The product contains Gallium-Arsenide (GaAs). GsAs vapor and power are hazardous to human health if inhaled or ingested. ● Do not destroy or burn the product. ● Do not cut or cleave off any part of the product. ● Do not crush or chemically dissolve the product. Follow related laws and ordinances for disposal. The product should be excluded from general industrial waste or household garbage.

TAIWAN MICROELECTRONIC CONFIDENTIAL